


Operation Instruction

M-205S Single-channel Remote Controller

Make your choice.....

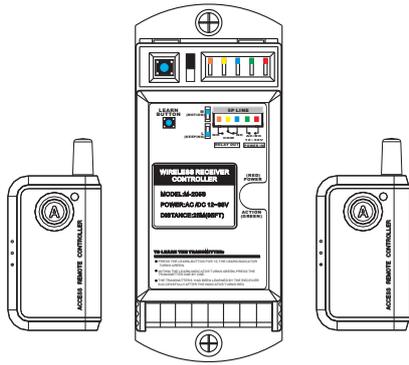


1 Safety Instruction

! Thank you for your purchasing, please read the instruction before using.

2 The Over-all Characteristic

- Adopt uniformity frequency with high stability of wireless signal receiving and sending.
- Operation frequency :315M.
- Remote transmitter adopts low-power consumption design with fat transmit distance. Long-service life of battery.
- It has a fully independent large-capacity contact signal output, which can be used for external access control.
- DC/AC12-36V voltage input
- There will be an audible indication when the remote control is switched, and the red light will turn green at the same time, you can confirm whether the switch is effective.
- L-type or M-type available for chosen for output state.
- Self-learning code matching is used to facilitate customers to add remote control handles at any time.

3 Product Over-View

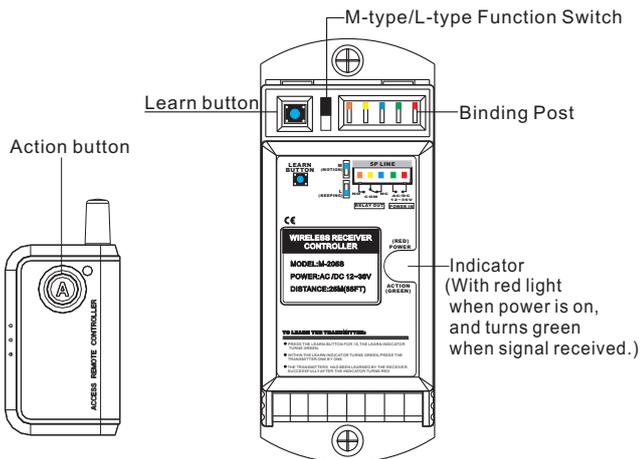


Remote Transmitter


Wireless Receiver

- This product is with the function of coding self-learn. Make sure the code of remote transmitter has been learned into the receiver before using.(16 kinds of codes can be learned.)
- Operation way: Press the learn button,indicator turns green .Press any key of the remote transmitter .Two flashes of green light --the transmitter has been learned by the controller successfully.
- Delete method: Press the learn button for 5s, green light flashing, all codes have been deleted successfully.(Can not be deleted one by one)
- Power should be cut in case of switching the function (L-type or M-type) Otherwise,the receiver maintains the previous state.


4 Definition of Input and Output

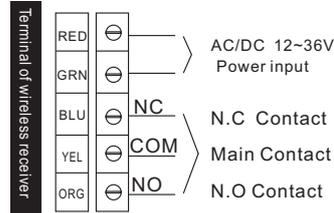

5 Wire Diagram

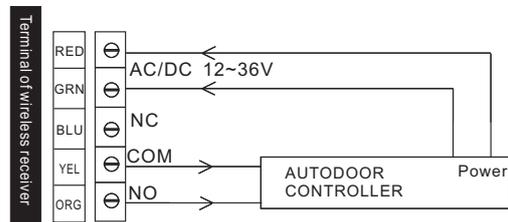

Connection with Autodoor (M-type)

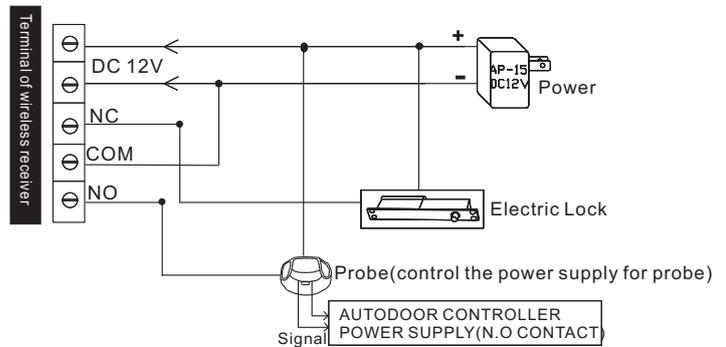

Connection with Probe and Electric lock(L-type)

6 Technical Parameters

(Wireless Receiver)
 Power Supply: AC/DC12~36V
 Static Current:15mA
 Action Current:80mA
 Relay contact capacity:20A 14VDC

(Remote Transmitter)
 Life of Battery :More than 20000times
 Transmit Distance: More than 25M
 Operation Temperature:-42°C~45°C
 Operation Humidity :10~90%RH
 Dimension:123mm(L)*50mm(W)*32mm(H)(Wireless receiver)