

Operation Instructions


M-227L Laser Safety Curtain Sensor



1 Safety instruction



! Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.

2 Product Overview

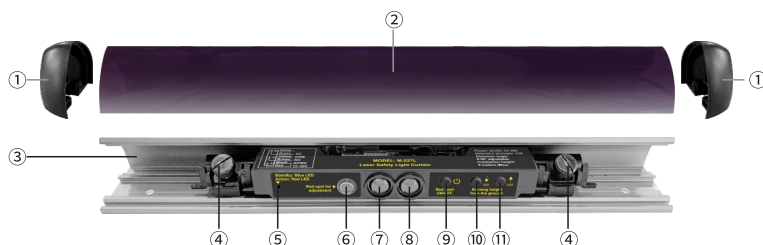

- ① End cover
- ② Filter front cover
- ③ Aluminum housing
- ④ Mounting Brackets
- ⑤ Indicator light
- ⑥ Positioning red dot
- ⑦ Transmitting cabin
- ⑧ Receiving cabin
- ⑨ Positioning red dot switch
- ⑩ Scan range close to ground switch
- ⑪ Scanning range away from ground switch
- ⑫ Wire interface x 2
- ⑬ Connection socket

Wiring Diagram ▶

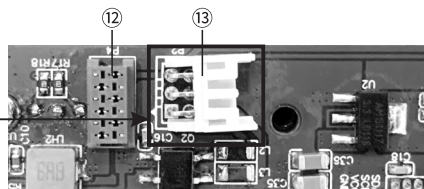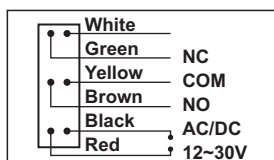



Remark: According to the usage, maybe you need to dismantle the left or right end cover. First loosen the screws, then removal the end cover and front cover.

3 Installation and debugging

Installation



- Option 1:** Loosen the two screws from the mounting bracket, then push them to another side. [1]
- Option 2:** Loosen the screws. Then take the bracket holder and the sensor out from aluminum housing carefully.

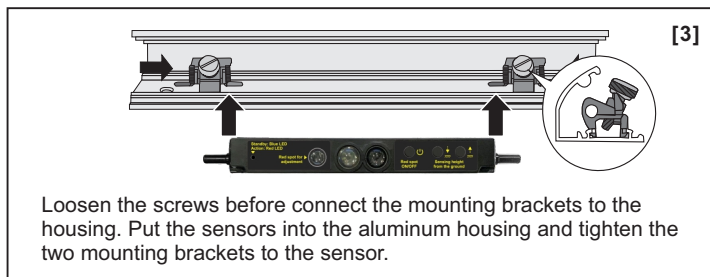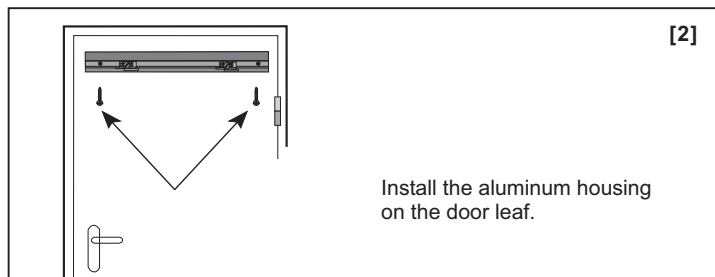


Debugging




Each adjusted the position of laser beam, **please recover the filter cover, power-off then re-power on**, self-learning with 8 seconds. When you hear a quick beep and a blue light flash, it means that it's in the learning background. When you hear a long beep, the learning is complete, the blue light is always on, and the system can work normally. Generally, no special adjustment is required. The factory default scanning range is about 35cm from the ground. If adjustment is required, the steps are as follows:

[1] Adjust the scanning range by button

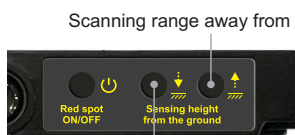

The scanning range total 7 levels, push button once, one beep voice, scanning range increase or decrease about 5cm, if you hear two beep voice, it's mean the scanning range is to the limit.

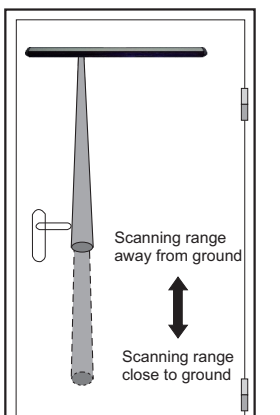

[2] Working mode




Normally Mode

Push and hold the button for 3s, with a long beep voice, entering the normally state.

Stable Mode

Push and hold the button for 3 seconds, with a long beep voice, entering the stable state.

The stable mode is recommended when there are unstable environmental factors such as floating blades, complex ground, and rainy days. The factory default is normal mode.

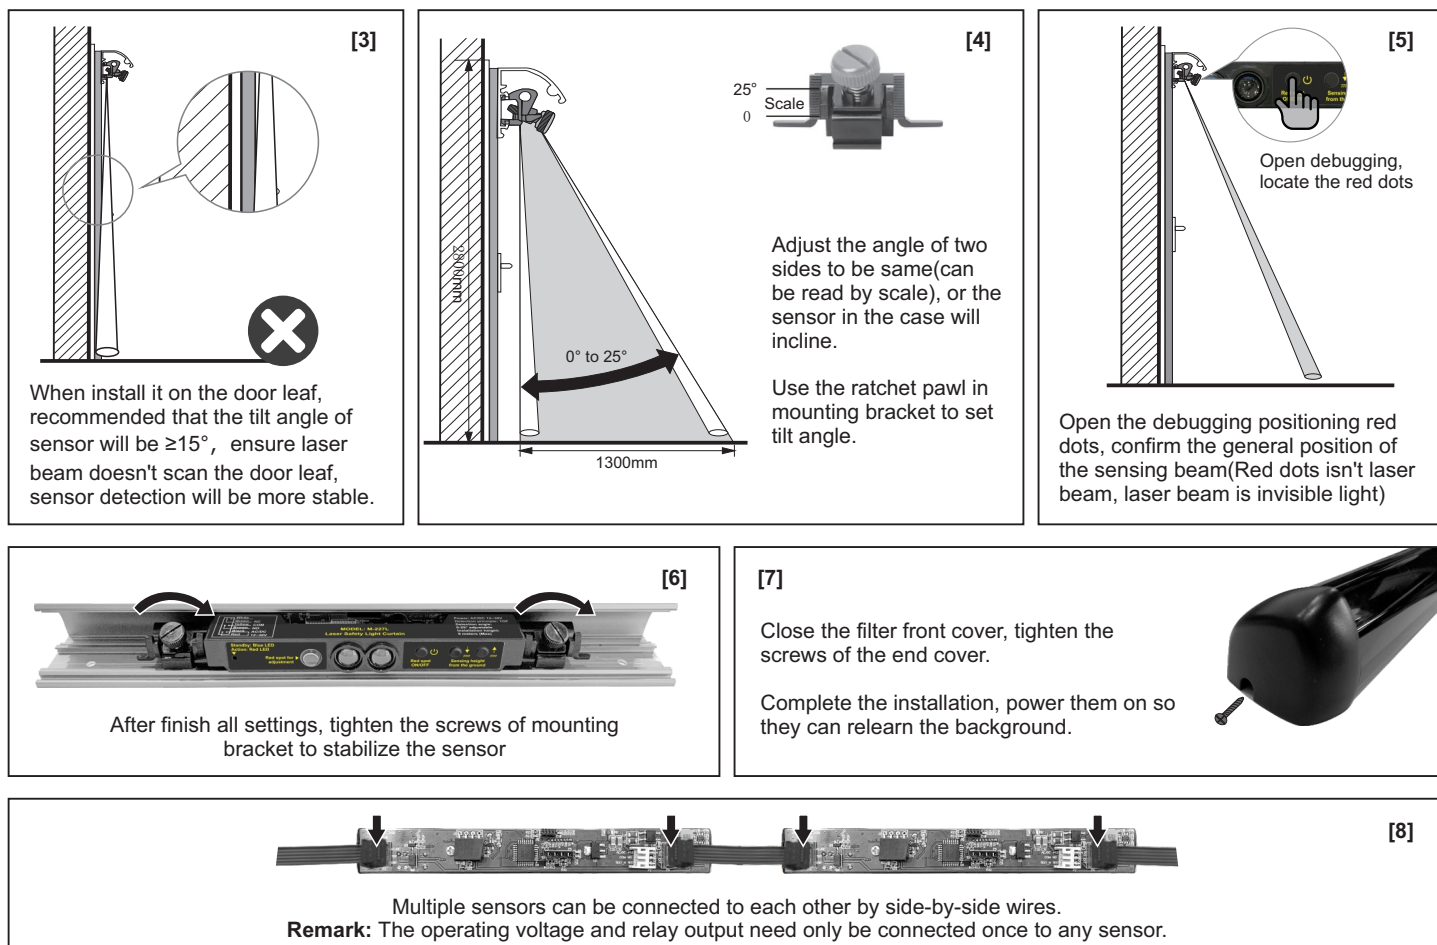

4 Troubleshooting

Symbol	Reason	Methods
Sensor indicator light don't work, no beep voice	Power supply isn't connect	Check the power supply and wiring
When door open, red light flashes, door run unstable	Scanning range is too close to ground	Adjust the scanning range height
Sensor indicator light is normal, door is always open	Signal cable NO NC connection error	Reconnect the signal cable correctly
Sensor red indicator is always on, door is always open	Background learning don't complete	Power off then power on and learn background

5 Technical parameters

Detection principle: Time-of-Flight technology(TOF)	Working voltage: AC/DC 12-30V
Light medium: 890nm infrared laser	Standby current: 50mA(12V power)
Laser category: Class I eye-safe laser	Action current: 90mA(12V power)
Detection diameter: 100mm light spots(2.8meters height)	Signal output: Relay NO or NC
Detection reaction time: ≤ 50 ms	Trigger mode: Moving or stationary
Detection range: away from the ground large than 20CM	Function instruction: LED indicator, standby: BLUE, detection: RED
Detection angle: 0-25° adjustable	Shell material: Aluminum alloy, ABS, PC
Installation height(max): 5m(fixed position), 3.5m(moving door leaf)	Sensor dimension: 310x44x39mm, 620x44x39mm, 750x44x39mm, 900x44x39mm, 1200x44x39mm(optional)
Working temperature: -20°C~60°C	

* The laser safety classification of this product is based on IEC 60825-1:2014.

6 Packing List

NO.	NAME	QUANTITY	REMARK
1	Laser safety curtain sensor	1 pc	
2	Operation instructions	1 pc	
3	Cable	1 pc	65cm
4	Installing bracket	1 pc	
5	Screw bag	1 bag	