

Operation Instructions

Make your choice...

M-708C Electronic Tag




1 Safety Instruction




Thank you very much for purchasing this product, in order to use this product correctly, please read this operating manual carefully before use.

2 Product Overview

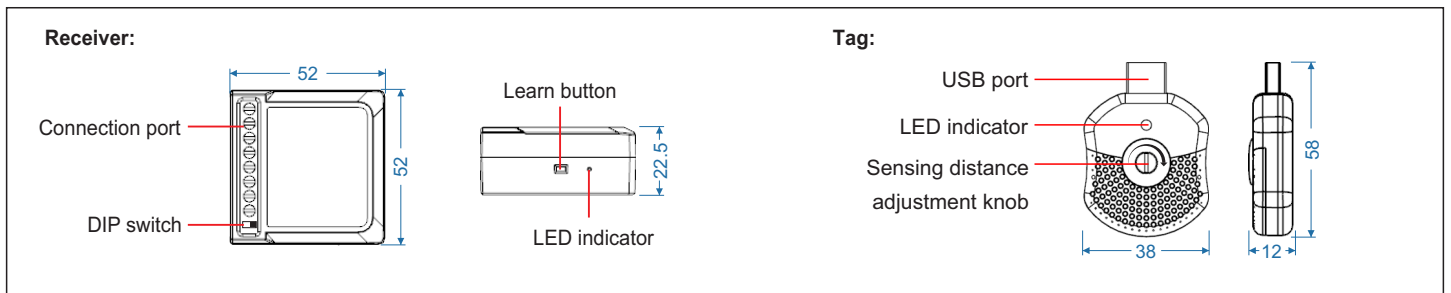

3 Wiring Diagram

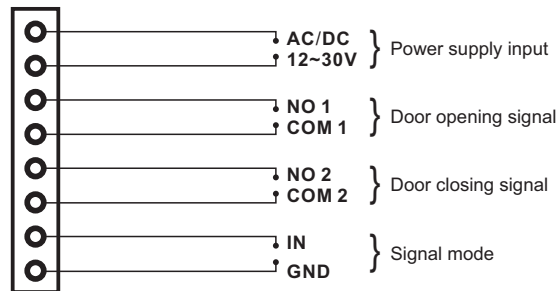

4 Product instructions


After the electronic tag is powered on, it will always transmit the door opening instruction, and the receiver will output the door opening signal when it receives the instruction, until the door opening instruction is lost then it will output the door closing signal. Examples are as follows:

(1) The car drives to the automatic door

- a. The car has not reached the response distance range, the automatic door will not open;
- b. The car has entered within the response distance, the automatic door opens automatically.

(2) The car leaves the automatic door

- c. The car is not out of the response distance range, the automatic door is still open;
- d. The car is out of the response distance, the automatic door closes automatically.

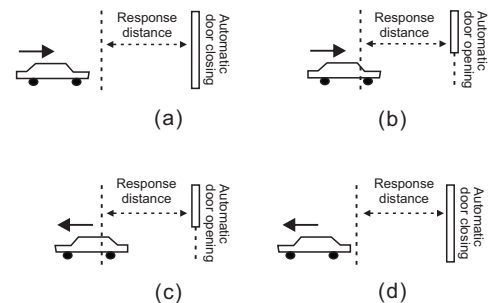

5 Function instructions

1. The receiver learns the vehicle tag ID

a. Please press the learning button of the receiver once, the blue indicator light is on; b. Press the tag's button once; c. The blue indicator light of the receiver flashes, learning successfully. (NOTE: Up to 300pcs ID in total)

2. Delete the matched tag's ID

Press and hold the learn button of the receiver for 5 seconds, the blue indicator light flashes quickly, all ID will be deleted.

3. Adjust the sensing distance between the electronic tag and the receiver




Adjust clockwise, the distance is more far, tag's indicator light flashes from slow to fast.
Adjust counterclockwise, the distance is more close, tag's indicator light flashes from fast to slow.

4. Receiver output signal instructions


1) Door opening signal hold mode

Receiving the electronic tag instructions continuously, the door opening signal remains output, until the electronic tag instruction lost, and then output the door closing signal for 1 second.





2) Door opening signal inching mode

Receiving the electronic tag instructions continuously, the door opening signal output for 1 second, until the electronic tag instruction lost, and then output the door closing signal for 1 second.



5. Receiver's wireless signal filtering settings

 Filter ON	Filter out the phenomenon that the door opening signal may sometimes not appear when the electronic tag signal is weak. It is recommended to use it in scenarios where the wireless signals of electronic tags, such as AGV cars will not be blocked.	 Filter OFF	Improve the sensitivity, the receiver receives the electronic tag signal immediately output the door opening signal. It is recommended to use in the scene where the wireless signal of electronic tags such as cars will be blocked.
---	---	--	---

6 Technical parameters

Receiver:		Electronic Tag:	
Power supply:	DC/AC 12-30V	Power supply:	DC 5V~12V(USB port)
Static current:	15mA(DC12V power)	Action current:	50mA(5V power, max sensing distance)
Action current:	35mA(DC12V power)	Dimension:	58(L)x38(W)x12(H)mm
Frequency:	433MHz		
Dimension:	52(L)x52(W)x22.5(H)mm		
Sensing distance:	30 meters		

7 Packing List

No.	Name	QTY	Remark
1	Electronic tag	1	
2	Receiver	1	
3	3M tape	1	
4	Operation Instructions	1	